

CP-UNC-TE41ZL6C-VMDS-Q

4MP Network IR Bullet Camera - 60Mtr.



- 1/2.7" 4MP PS CMOS Image Sensor (0.9407 Centimeters)
- Max. 4MP (2688 × 1520)@1-25/30 fps
- Instastream, H.265, H.264, H.264H, H.264B, MJPEG
- Support Quad stream
- WDR(120dB), Day/Night(ICR), 3D NR, ROI, Defog, BLC, HLC, AWB, AGC
- 2.7mm ~13.5mm Motorized Lens
- IR Range of 60 Mtr.
- Support Starlight Technology
- Support Built-in Mic
- Micro SD, IP67, IK10, PoE
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro Lite



System Overview

This Series has gathered a lot of fame over the years for its eminent capabilities on top of its artful appearance which lets it mix in any background. This series entails a wide range of easily-mountable solutions that have been crafted with the IR Megapixel technology that delivers resolutions varying from 2MP to 8MP depending on your choice of products. This Series comes with a varifocal lens/motorized/fixed lens and is absolutely pocket-friendly, which makes it the best choice for a number of small and mid-size places

CTC Technology

CP PLUS Trusted Core Technology is a multi-layered security architecture that brings together the best of cyber security practices and technological intelligence. It is not just an enhancement; it is a complete redefinition of how surveillance should function in today's digital landscape- more intelligent, more secure, and more reliable than ever before.



CP-UNC-TE41ZL6C-VMDS-Q

4MP Network IR Bullet Camera - 60Mtr.

Functions

Wide Dynamic Range (WDR)

When a scene is partly dark and partly bright, that is the dynamic range that distorts images due to this difference in the lighting. WDR technology provides you balanced lighting for a clear and vivid image throughout the day. WDR technology can be installed at entry/exit points of any building structure, jewellery shops, outdoor location among so many other places.

Regions of interest

Regions of Interest (ROI) is a user defined feature that allows the operator to monitor specific areas of a scene while still maintaining overall situational awareness of less important areas.

Power over Ethernet

CP PLUS cameras with Power over Ethernet (PoE) technology offer a simple and efficient installation by using a single Ethernet cable to deliver both power and data. This eliminates the need for separate power adapters, reduces cable clutter, and ensures a cleaner setup.

True Day/Night (ICR)

When the scene is too dark, the image is captured by illuminating an infrared light through the camera onto the scene that greatly helps with making the scene visible for the lens. It delivers color images during the day and automatically switches to the monochrome feature as the scene darkens.

IK10 Technology

This product has been inculcated with the IK10 vandal resistance technology which is the topmost mechanical protection in the surveillance industry. This technology enables your camera in developing a strong and robust appearance that can't be defeated by water, dust or even severe shocks as the powerful housing of this camera deters any damage from occurring.

About CP PLUS

The brand that is on its way to lead the world when it comes to the security and surveillance industry, CP PLUS, keeps bombarding the market with the most reliable range of products that have been designed carefully and methodically to automate the whole surveillance and security process, no matter how big your premises are.

It was the initiative to help the public in the area where they are the most vulnerable and to empower the sense of safety in our hearts that had conceptualized CP PLUS. And embarking on its mission to make the world a safer and more secure place has taken the brand's journey to unprecedented levels even when compared to international competitors.



CP-UNC-TE41ZL6C-VMDS-Q

4MP Network IR Bullet Camera - 60Mtr.


Feature	Specification
Image Sensor	1/2.7" 4MP PS CMOS Image Sensor (0.9407 Centimeters)
Effective Pixels	2688(H) × 1520 (V)
Minimum Illumination	0.001 lux@F1.4 (Color, 30 IRE), 0.0001 lux@F1.4 (B/W, 30 IRE), 0 lux (IR on)
Angle Adjustment	Pan: 0°–360°, Tilt: 0°–90°, Rotation: 0°–360°
Shutter Speed	Auto/Manual 1/3 s–1/100,000 s
White Balance	Auto, Natural, Street lamp, Outdoor, Manual, Regional custom
RAM	512 MB
ROM	128 MB
DORI Distance	Lens W: 44.1 Mtr. (Detect), 17.7 Mtr. (Observe), 8.8 Mtr. (Recognize), 4.4 Mtr. (Identify) Lens T: 144.8 Mtr. (Detect), 57.9 Mtr. (Observe), 29.0 Mtr. (Recognize), 14.5 Mtr. (Identify)
Gain Control(AGC)	Auto
Lens Type	Motorized vari-focal
Max. Aperture	F1.4
Lens Mount	M14
Close Focus Distance	0.8 m
Lens	2.7mm~13.5mm
Back Light Compensation	BLC/ HLC/ WDR(120dB)
Angle of View	H: 109°–30°, V: 56°–17°, D: 131°–35°
IR Number	4 IR LED
IR Distance	IR Range of 60 Mtr.
Iris Control	Auto
IR Control	Auto, Zoomprio, Manual
AI Instastream	AI H.265, AI H.264
Video Compression	Instastream, H.265, H.264, H.264H, H.264B, MJPEG (Only supported by the sub stream)
Motion detection	OFF/ON (4 areas)
Privacy Mask	4 Area

Feature	Specification
Stream Capability	Quad Stream
Frame Rate	Main stream: 4MP (2688 × 1520)@1-25/30 fps, 1080P (1920 × 1080)@1-25/30fps, 1.3MP (1280 × 960)@1-25/30fps, 720P (1280 × 720)@1-25/30fps Sub stream 1: D1 (704 × 576/ 704 × 480)@1-25/30 fps, VGA (640 × 480)@1-25/30fps, CIF (352 × 288/ 352 × 240)@1-25/30fps Sub stream 2: 1080P (1920 × 1080)@1-25/30fps, 1.3MP (1280 × 960)@1-25/30fps, 720P (1280 × 720)@1-25/30fps, D1 (704 × 576/ 704 × 480)@1-25/30 fps Sub stream 3: D1 (704 × 576/ 704 × 480)@1-25/30fps
IVS(Perimeter Protection)	Intrusion, Tripwire, Abandon Object, Crowd gathering, Missing Object, Loitering Detection, IMD (support the classification and accurate detection of vehicle and human)
People Counting	Tripwire people counting, Generating and exporting report (Day/Week/Month/Year), People counting in area and queue management, Generating and exporting report (Day/Week/Month), 4 rules can be set for tripwire, People counting in area and queue management
Video format	PAL/NTSC
ROI	Support (4 Areas)
IMD	Support
Mirror Function	Support
Overlay	Privacy Masking, Channel Title, Time Title Location, Custom Title, Face Statistics
S/N Ratio	>56 dB
Audio	Built-in Mic
Audio Compression	PCM, G.711a, G.711Mu, G.726, AAC
Resolution	4MP (2688 × 1520), 2MP (1920 × 1080), 1.3MP (1280 × 960), 720p (1280 × 720), D1 (704 × 576/ 704 × 480), VGA (640 × 480), CIF (352 × 288/ 352 × 240)
Image Stabilization	Electronic Image Stabilization (EIS)
Noise Reduction	3D NR
Protocol	IPv4, IPv6, HTTP, HTTPS, TCP, UDP, RTP, RTSP, RTCP, RTMP, SMTP V3, SFTP, DHCP, DNS, QoS, UPnP, NTP, Multicast, ICMP, IGMP, NAS, PPPoE, SNMP, Auto Connect, TLS v1.2 and v1.3, ONVIF (Profile S, Profile G, Profile T), InstaOn
Device Search Tool	IP finder
OTA (Over-The-Air)	Support
Day/Night	Auto(ICR)/Color/B/W
Ethernet	RJ-45 (10/100 Enhancement Base-T)
Cyber Security	AES 256-bit Encryption, Configuration encryption, Trusted execution, Digest, Security logs, WSSE, Account lockout, Syslog, Video encryption, 802.1x, Allow list/Block list, HTTPS, Trusted upgrade, Trusted boot, Firmware encryption
Image Rotation	0°/90°/180°/270°
Reset Button	Support

Feature	Specification
Event Alarm	No SD card, SD card full, SD card error, Network disconnection, IP conflict, Motion detection, Video tampering, Tripwire, Intrusion, Abandoned object, Missing object, Loitering detection, Crowd gathering, Scene changing, Audio detection, Voltage detection, External alarm, Face detection, IMD, People counting in area, Stay detection, People counting, Abnormal Number of People, Queue people number alarm, Queue time alarm, Security exception, Defocus detection
Defog	Support
Audio Input	1 Channel (RCA port)
Audio Output	1 Channel (RCA port)
Alarm IN	1 Channels in: wet contact, 5mA 3V–5V DC
Alarm Out	1 Channel out: wet contact, 300mA 12V DC
SDK and API	Support
Face Detection	Face detection, Target Box Overlay, Remove Duplicate, Faces Face Cutout(Face/ One Inch Photo/ Custom) , Snapshot Mode(Real- Time/ Optimized/ Quality Priority), Optimal face snapshot upload; face attributes extraction including 6 attributes and 8 expressions; snapshot strategies (real-time snapshot, quality priority and optimization snapshot); face angle filter; Optimized Duration, Quality Threshold, Snapshot Sensitivity
Bit Rate	H.265: 3 kbps–6144 kbps, H.264: 3 kbps–6144 kbps
Bit Rate Control	CBR/VBR
Browser	Microsoft, Edge and Chrome
Storage	SFTP, NAS, Mirco SD card (Max. 512GB)
User/Host	20 (Total bandwidth: 80 M)
Weatherproof Standard	IP67, IK10
Certificates	ISO 9001: 2015, ISO 20000-1 : 2018, CE, FCC and RoHS, BIS, STQC approved compliance report
Power Source	12 VDC/PoE (802.3af)/ePoE
Power Consumption	Basic: 1.6W (12 VDC); 3.3 W (PoE) Max. (H.265+ WDR+ Intelligence on+IR on): 9.6W (12 VDC); 11.9W (PoE)
Operating Temperature	–30 °C to +60 °C (–22 °F to +140 °F)
Operating Humidity	≤95%
Storage Temperature	–40 °C to +60 °C (–40 °F to +140 °F)
Storage Humidity	10%–95% (RH), non-condensing
Casing	Metal + Plastic
Dimension	273.2 mm × 95.0 mm × 95.0 mm
Weight	1100g

Published Date –29-05-2026

Dimensions (mm/inch)

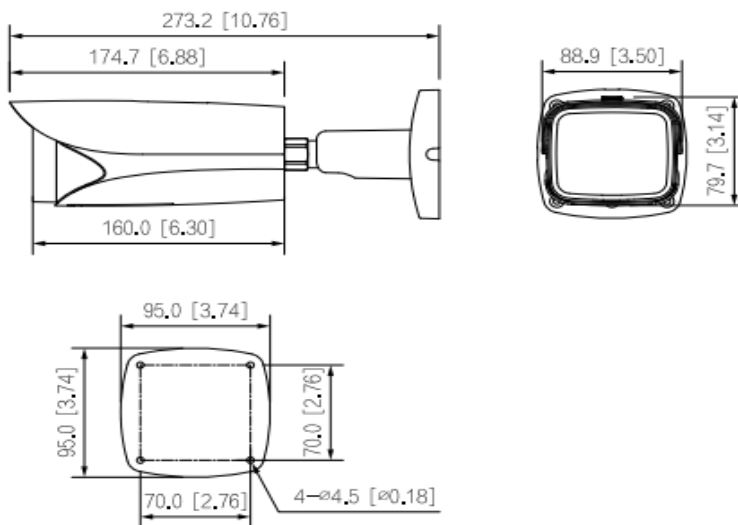

Company Name:

CP PLUS (Aditya Infotech Ltd.)

F-28 Okhla Industrial Area, Phase 1,

New Delhi 110020, INDIA

Contact Mail ID :- customercare@cpplusworld.com